


# DIMENSION4

## UWB Tag Module

### OVERVIEW

The Ubisense DIMENSION4 Tag Module provides precise tracking capabilities of the standard Ubisense tags together with the ability to easily integrate that functionality into other devices.

It is supplied with a 20-way (2 x 10) 1.27mm pin header, which provides for power supply, general input / output and serial data communication, enabling increased integration flexibility.

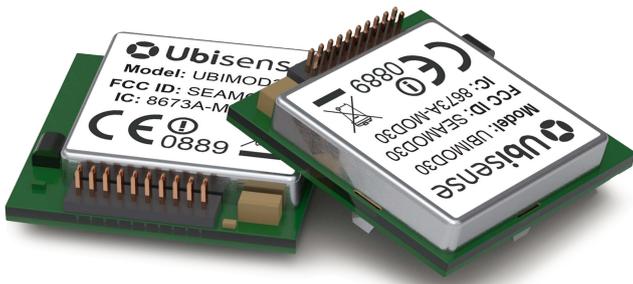

### ACCURATE LOCATION

The tag module transmits ultra-wideband (UWB) radio pulses which can be used by the Ubisense location system to find its position. By using UWB, the system's high accuracy is maintained even in cluttered, multipath-rich indoor environments.

The Ubisense UWB location system is the only one capable of measuring both Angle-of-Arrival (AoA) and Time-Difference-of-Arrival (TDoA) of the tag's signals, enabling it to generate accurate 3D tracking information even when only two sensors can detect the tag module.

### Specifications

**Dimensions:**

25.4mm x 24.5mm x 9.1mm  
(1" x 1" x 0.36")

**Weight:**

5g (0.18oz)

**Temperature:**

-40°C to 85°C (-40°F to 185°F)

**Humidity:**

0 to 95%, non-condensing

**Enclosure:**

N/A

**Update rate:**

Up to 30Hz (configured during commissioning)

**Peripherals:**

20-way expansion header, Motion detector

**Radio frequencies:**

Ultra-wideband channel: 6 - 7GHz  
Configuration channel (optional): Narrow-band 2.4GHz

**Certifications:**

**US:** FCC Part 15; FCC ID SEAMOD31

**EU:** CE

**Canada:** RSS-Gen, RSS-210, RSS-220; IC: 8673A-MOD31

**Power supply:**


Powered by host device

**Mounting options:**

N/A

**Ubisense part codes:**

D4MODULE31

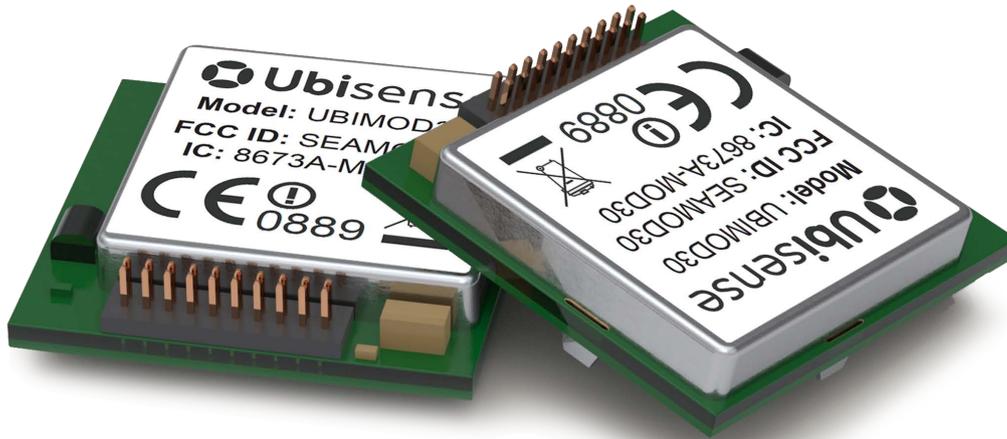

### INTEGRATION-READY FEATURES

The DIMENSION4 Tag Module is intended for direct integration into other products. It is compact, includes all required antennas (permanently attached to the module), and has a 20-way expansion header that can be used to supply power to the device.

Furthermore, the header allows the module to communicate bi-directionally with a host device or external sensors and actuators.

### FLEXIBLE UPDATE RATES

The update rate of the Tag Module may be automatically varied depending on tag activity. An inbuilt motion detector ensures that when the tag is moving, a high update rate is assigned for best tracking; if it is stationary, the update rate may be reduced.

### LOCATION AWARE DEVICES

DIMENSION4 is already integrated into several production-critical industrial tools and devices supporting location-aware process control. This includes high-end torque tools, barcode scanners and tablets.

### CERTIFICATION

The DIMENSION4 Tag Module has received Modular Certification in the US and Canada, and is designed to meet plug-in radio module requirements in Europe.

By following the instructions supplied with the Ubisense Tag Module, integrators will minimise the RF emissions testing required on their final product.



To find out more, contact us on:

US +1 720 217 4397    UK +44 1223 53 5170  
DE +49 211 229733-0    FR +33 1 83 79 06 82

[www.ubisense.com](http://www.ubisense.com)